


# AW-5890A Thermal Receipt Printer

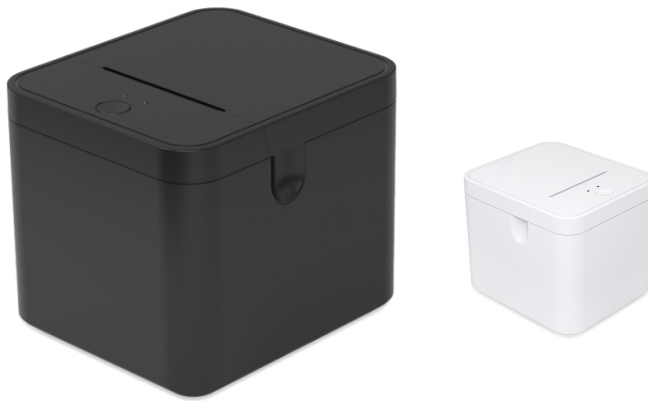

## Specifications

Interfaces	USB / USB+Bluetooth (Optional)
Printing Command	ESC/POS
Printing Method	Thermal Line Printing
Printing Speed	90mm/sec (max)
Printing Density	384 dots/line
Character set	GB18030 (Simplified Chinese)
Print Font	ASCII Font A: 12×24 ASCII Font B: 9×17 Chinese: 24×24
Character per line	Font A-32 lines/Font B-42 lines/Chinese-16 lines
Input buffer	32 Kbytes / 64 Kbytes
Printer Head Life	50KM
Printer Driver	Windows / Linux / MAC / OPOS

## Paper

Paper Type	Thermal Roll Paper
Paper Width	57.5±0.5mm
Paper Roll Diameter	Φ 50mm
Paper Thickness	0.06-0.08mm
Paper Out Detection	Support
Paper Cut	By hand

## Electrical

Adapter Voltage	DC 12V/3A
Cash Drawer Control	12V/1A

## Package

Printer Dimension	120*105*102mm
Unit Weight	0.58kgs (with accessories)
Pieces Per CTN	24 Pieces
Printer Color	Black or White
CTN Dimension	57.2 x36 x 35.8 cm
Carton Weight	15kgs

## Working Environment

Temperature	Working: 0~45°C
Humidity	Humidity: 10%-80%

## Accessories

USB Cable	1 Piece
Thermal Roll	1 Piece
Manual	1 Piece
Power Cable	1 Piece